



EFix TCS260

TCS260 1x28W/840 HFS C6 WH

EFix surface mounted - 1 pc - 28 W - 840 neutral white - HF Standard - High-gloss optic double parabolic closed - White

The EFix TL5 luminaire range is a dedicated, affordable choice of innovative lighting that enables massive energy savings to be made when old electromagnetic installations are replaced by the latest Philips technology. The range's optical performance complies with the latest EN-12464 norms, ensuring improved lighting quality in every application. Used in combination with high-frequency gear, Philips MASTER TL5 lamps enable substantial energy savings to be made. These savings can be further increased by using a Luxsense daylight controller integrated into the luminaire. The practical design of EFix combines both surface-mounted (TCS260) and suspended (TPS262) luminaires in one design. Thanks to the luminaire's easily removable top cover, the beam can be adjusted to provide direct or direct/indirect lighting. EFix is supplied with lamps and is ready to install, minimizing installation time. EFix recessed TBS260 completes Philips' range of luminaires for general lighting applications in offices and shops.

Product data

| General Information | |
|-------------------------|--|
| Number of light sources | 1 pc |
| Lamp family code | TL5 [TL5] |
| Lamp power | 28 W |
| Light source color | 840 neutral white |
| Kombipack | Lamp(s) included |
| Gear | HFS [HF Standard] |
| Optic type | High-gloss optic double parabolic closed |
| Optical cover/lens type | - |
| Emergency lighting | - |

| Embedded control | - |
|----------------------|---|
| Internal wiring | Standard |
| Protection class IEC | Safety class I |
| Flammability mark | For mounting on normally flammable surfaces |
| CE mark | CE mark |
| Product family code | TCS260 [EFix surface mounted] |
| Light Technical | |
| Light Distribution | Direct lighting |

EFix TCS260

Operating and Electrical

| | |
|---------------|--------------|
| Input Voltage | 220 to 240 V |
|---------------|--------------|

Mechanical and Housing

| | |
|--------------------------------------|---------------|
| Housing configuration | Basic version |
| Fixation point length distance (Nom) | 1000 mm |
| Overall length | 1241 mm |

Approval and Application


| | |
|-------------------------|--------------------------|
| Ingress protection code | IP20 [Finger-protected] |
|-------------------------|--------------------------|

Product Data

| | |
|-------------------|-----------------|
| Full product code | 872790061194600 |
|-------------------|-----------------|

| | |
|---------------------------------|----------------------------|
| Order product name | TCS260 1x28W/840 HFS C6 WH |
| EAN/UPC - Product | 8727900611946 |
| Order code | 910402382212 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 1 |
| Material Nr. (12NC) | 910402382212 |
| Net Weight (Piece) | 3.100 kg |

Dimensional drawing

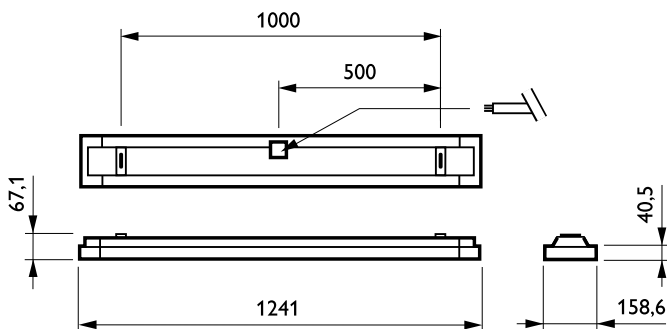

EFix TCS260

